

®



GTX Series Subwoofers

General Features

- * Heavy Gauge Steel Basket With Industrial Texture Painting, MASSIVE Punched Logo
- * High Flux Y30 Strontium Ferrite Magnet
- * High Impedance Aluminum Former With EISV Voice Coil
- * Poly Cotton Spider With Woven Round Tinsel Leads
- * Non-Pressed Paper Cone With Pressed Foam Surround
- * Round Shape PP Vacuum Dust Cap
- * 10mm Top Plate

Specifications

CONFIGURATION	GTX 64			GTX 84			GTX 102			GTX 104			GTX 122			GTX 124			GTX 124R			GTX 154			
	Voice Coil	Dual 4 ohm	Dual 4 ohm	Dual 4 ohm	Dual 2 Ohm	Dual 4 Ohm	Dual 2 Ohm	Dual 4 Ohm	Dual 2 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm	Dual 4 Ohm			
FS	Hz	58.8	42.1	46.2	49.8	41	40.2	43.4	34.8																
Qms		5.17	4.87	6.738	5.87	6.43	6.45	6.84	5.99																
Vas	liters	4.2	9.3	9.36	6.7	23.2	23.5	17.4	66.8																
Cms	um/N	0.15	0.18	0.06	0.04	0.07	0.07	0.05	0.07																
Mms	g	47.7	79.1	196.4	200.4	226.1	232.4	308.8	294.7																
SPL@2.83V/1m	dB	88	88	88	88	88	88	88	88																
Watts RMS	W	250	400	700	700	700	700	1000	700																
Peak Power	W	500	800	1400	1400	1400	1400	2000	1400																
Xmax	mm	9	10	15	15	15	15	15	15																
Magnet Weight	oz	70	90	120	120	120	120	150	120																
Xmech	mm	38	38	37	37	37	37	37	37																
Dia	mm	133	155	205	205	255	255	255	322																
Sd	sq.m	0.014	0.019	0.033	0.033	0.051	0.051	0.051	0.081																
Vd	liters	2.02	3.32	4.23	4.23	5.35	5.35	5.85	7.45																
ELECTRICAL		Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series			
Qes		1.07	0.57	0.57	1.18	0.60	0.59	1.405	0.724	0.825	1.30	0.68	0.72	1.34	0.69	0.70	1.56	0.82	0.83	1.65	0.99	0.97	1.83	0.82	0.85
Re	ohms	3.4	1.7	6.8	3.4	1.7	6.8	3.4	1.7	6.8	3.4	1.7	6.8	1.8	0.9	3.6	3.4	1.7	6.8	3.4	1.7	6.8	3.4	1.7	6.8
Le	mH	0.63	0.60	2.41	0.71	0.71	2.85	0.65	0.64	0.72	0.93	0.91	3.2	0.64	0.82	2.48	0.96	0.92	3.21	0.78	0.82	0.32	0.93	0.90	3.16
BL	Tm	7.6	7.3	14.5	7.7	7.9	15.6	11.3	10.8	16.5	10.1	13.5	26.0	88	8.7	16.8	11.2	11.0	21.8	12.8	11.8	24.9	11.8	11.5	22.3
Pe	Watts	125	250	250	200	400	400	350	700	700	350	700	700	350	700	700	350	700	700	500	1000	1000	350	700	700
ELECTROMECHANICAL		Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series	Individual	Parallel	Series			
Qts		0.88	0.51	0.52	0.45	0.54	0.52	1.15	0.65	0.74	1.06	0.61	0.63	1.11	0.62	0.63	1.24	0.73	0.73	1.21	0.87	0.856	1.28	0.72	0.74
no	%	0.08	0.15	0.15	0.06	0.11	0.11	0.04	0.12	0.11	0.11	0.12	0.11	0.12	0.22	0.23	0.10	0.18	0.18	0.09	0.16	0.14	0.16	0.32	0.32
1-W-SPL	dB	80.3	83.4	83.6	80.2	83.5	83.8	86.1	86.5	86.8	85.2	86.1	87.5	87.3	86.7	86.9	86.7	85.3	86.7	86.3	86.3	86.3	85.9	87.0	86.9
2.8V SPL	dB	81.9	84.6	84.9	81.8	84.8	85.1	87.8	87.9	88.3	85.9	87.5	87.3	88.0	88.6	88.4	88.6	87.9	87.7	85.8	87.1	86.8	86.7	88.1	87.9

500
PEAK WATTS


800
PEAK WATTS

1400
PEAK WATTS


2000
PEAK WATTS




GTX 64




GTX 84




GTX104/GTX102




GTX124/GTX122




GTX 124R



GTX154




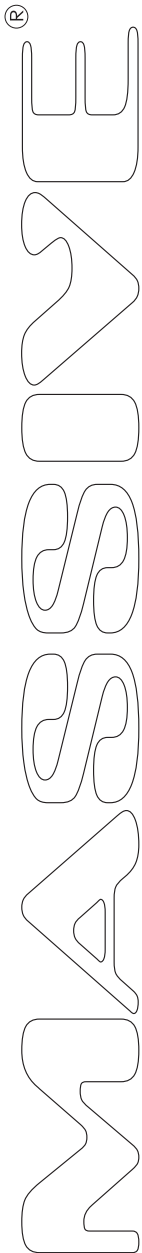

For More Customized Box Volume Specifications
Please visit www.massiveaudio.com

GTX Series Subwoofers


	GTX 64	GTX 84	GTX 102	GTX 104	GTX 122	GTX 124	GTX 124R	GTX 154
Mounting Depth (A)	4.06 in.	5.18 in.	6.34 in.	6.34 in.	6.69 in.	6.69 in.	6.77 in.	8.07 in.
Mounting Diamter (B)	6.77 in.	8.43 in.	10.39 in.	10.39 in.	12.28 in.	12.28 in.	12.28 in.	15.35 in.
Mounting cut diameter (C)	5.51 in.	7.25 in.	9.05 in.	9.05 in.	10.79 in.	10.79 in.	10.79 in.	13.62 in.
Net weight (Lb)	7.72	10.58	15.43	15.43	16.53	16.53	19.8	17.64
Displacement (ft3)	0.19	0.37	0.055	0.055	0.085	0.085	0.087	0.153

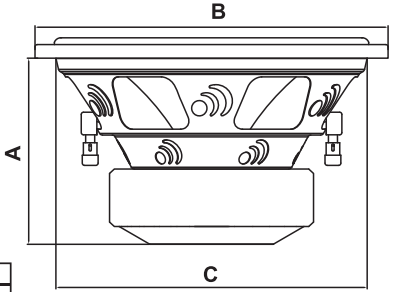

Recommended Enclosures:

	GTX 64		GTX 84		GTX 102		GTX 104		GTX 122		GTX 124		GTX 124R		GTX 154		
	Small	Large	Small	Large	Small	Large	Small	Large	Small	Large	Small	Large	Small	Large	Small	Large	
SEALED																	
Volume (cu. ft)	0.18	0.24	0.36	0.47	0.65	0.84	0.65	0.84	0.94	1.19	0.94	1.19	0.94	1.19	1.98	2.44	
Internal (Width x Height x Depth) in.	7x6.3x6.8	7.9x6.7x7.9	8.8x8x8.8	9.6x8.4x10.4	10.6x9.8x10.8	11.4x10.2x12.4	10.6x9.8x10.8	11.4x10.2x12.4	12.4x11.6x11.4	13.2x12x13	12.4x11.6x11.4	13.2x12x13	12.4x11.6x11.4	13.2x12x13	16x15.6x13.7	16.8x16x15.7	
F3 Hz	58	55	42	40	40	38	40	38	39	37	39	37	38	36	35	33	
Qtc	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	0.707	
PORTED																	
Volume (cu. ft)	0.21	0.29	0.41	0.55	0.72	0.95	0.72	0.95	1.03	1.33	1.03	1.33	1.03	1.33	2.13	2.69	
Internal Volume (W x H x D)	8.3x6.3x6.9	9.7x6.7x8.1	10.6x8.9	11.6x8.4x10.4	11.8x9.8x10.8	12.6x10.2x12.7	11.8x9.8x10.8	12.6x10.2x12.7	13.5x11.6x11.4	14.3x12x13.4	13.5x11.6x11.4	14.3x12x13.4	13.5x11.6x11.4	14.3x12x13.4	16.8x16x13.7	17.6x16.4x16.1	
Fb Hz	60	55	45	40	45	40	50	45	50	45	50	45	50	45	40	35	
Cabin Gain dBHz																	
Port round (D x L)	2.5x5.5	2.9x4.4	2.9x3.9	3.1x3.9	4.2x3.8	4.6x3.5	4.2x3.8	4.6x3.5	4.1x6.2	4.5x5.7	4.1x6.2	4.5x5.7	4.6x6.2	5.1x6.2	4.2x5.6	4.5x5.8	
Port Area sq. in.	4.9	6.5	6.8	7.9	13.7	16.6	13.7	16.6	13.2	16.2	13.2	16.2	16.3	20.3	13.9	16.2	
Dual Sub Box Ported																	
Volume (cu. ft)	0.35	0.46	0.7	0.9	1.28	1.63	1.28	1.63	1.85	2.33	1.85	2.33	1.85	2.33	3.86	4.88	
Internal Volume (W x H x D)	13.6x6.3x6.9	14.6x6.7x8.1	17.3x8x8.8	18x8.4x10.4	20.9x9.8x10.8	21.6x10.2x12.7	20.9x9.8x10.8	21.6x10.2x12.7	24.3x11.6x11.4	25.1x12x13.4	24.3x11.6x11.4	25.1x12x13.4	24.3x11.6x11.4	25.1x12x13.4	30.4x16x13.7	31.2x16.8x16.1	
Port (l) Square in.	3.98	5.2	5.8	7	12.2	14.7	12.2	14.7	12.2	14.3	12.2	14.3	15	17.9	12.7	14.8	
Port Length	3.88	3.2	4.9	4.6	4.6	4.8	4.6	4.8	6.69	6.9	6.69	6.9	7	6.9	6.4	6.6	
Fb Hz	60	55	45	40	45	40	50	45	50	45	50	45	50	45	40	35	

The port may have to be placed along the back wall facing the side. Place a brace between the subs about 4 inches wide on the inside.
Make sure that the end of the port "inside the box" is at least the same distance away from the back wall as the port diameter. If port is 4" round = 4.5" from wall

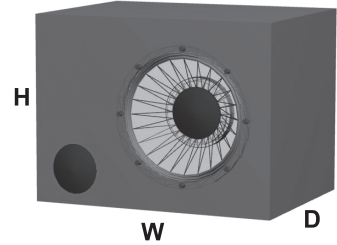

Attention:

- *Box sizes account for driver and port displacement
- *For higher SPL shortening the port length 3 in. will rise frequency +/- 5 Hz
- *Box specifications are internal. for external dimensions add the width of the box material to these dimensions.
- *A square port (slot) is preferred in high power applications for less vent noise.
- *Port area = width x height
- *For dual speaker, double the volume and the number of ports but keep the same length.
- *If possible use a divided box.
- *If a common chamber box is to be used, internal bracing is highly recommended
- *Please contact Massive Audio for custom applications.

