


Professional Audio Components

Quick Reference & Specification

Model	MA 6	MA 8	MB 6	MB 8	MB6C
Znom Ohms	8	8	8	8	8
Revc Ohms	5.2	5.2	5.2	5.2	5.2
Sd m2	0.014	0.02	0.014	0.02	0.014
Mmd Kg	0.0075	0.0145	0.0109	0.015	0.0112
Usable Range (Hz)	115-10000	85-8000	115-10000	90-8000	450-60000
Power MAX	280 W	300 W	300 W	350 W	300 W
Power RMS	140 W	150 W	150 W	175 W	150 W
Peak Power	300 W	350 W	350 W	400 W	350 W
Mms Kg	0.0082	0.0162	0.0135	0.0127	0.0112
Cms M/N	0.17	0.18	0.16	0.21	0.11
Vas m2	4.6	11.6	4.2	11.2	4.5
Resonant Frequency(Hz)	115	90	120	90	468
Qms	7.73	7.84	4.65	4.32	7.65
Qes	0.59	0.54	0.51	0.35	2.31
Qts	0.55	0.50	0.46	0.32	1.77
BL T*M	8.2	9.6	9.2	10.8	9.65
Sensitivity(dB)	96	96	97	97	98
No	1.25	1.62	1.51	1.66	1.17

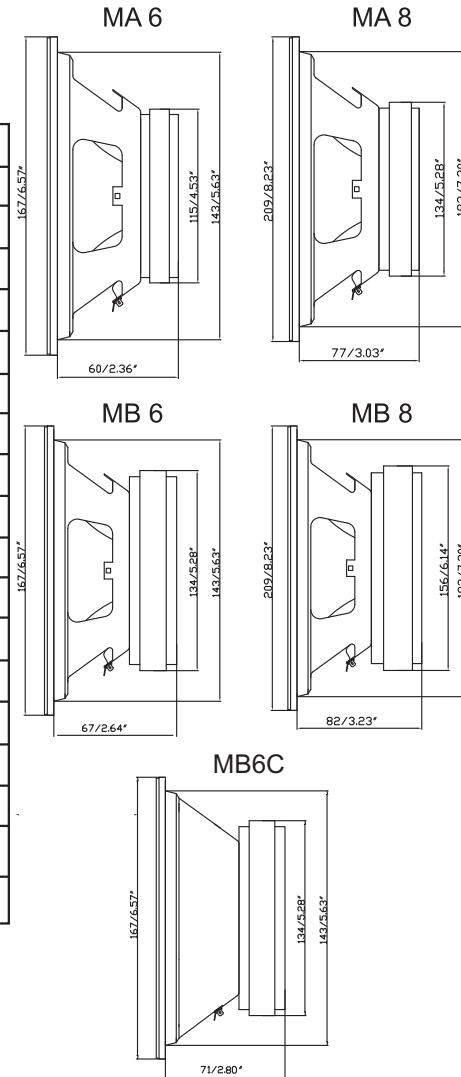

300
PEAK WATTS

350
PEAK WATTS

400
PEAK WATTS

Massive Audio, Inc. P.O. BOX 252004 Los Angeles, CA 90025 U.S.A. www.massiveaudio.com



Engineered in U.S.A.